


### TECHNICAL INFORMATION

MCQ Series		
Pitch Available (mm)	5.00/5.08	10.00/10.16
Poles Available	2 - 18	2 - 9
Voltage Rating	300V	750V
Current Rating	12A	12A
Solid wire section	30÷12AWG; 0.2 ÷ 2.5mm <sup>2</sup>	30÷12AWG; 0.2 ÷ 2.5mm <sup>2</sup>
Stranded wire section	30÷12AWG; 0.2 ÷ 2.5mm <sup>2</sup>	30÷12AWG; 0.2 ÷ 2.5mm <sup>2</sup>
Contact Resistance	<15mΩ	<15mΩ

PCB thickness	max. 2.4 mm (.094 in)
PCB Hole Diameter	min. 1.4mm (.055 in)
Stripping Length	10 mm (.39 in)
Operating temperature range	-40°C ÷ +110°C (-40 °F ÷ +230 °F)
Climatic Category	40/110/21 According to EN 60068-1


### DRAWINGS

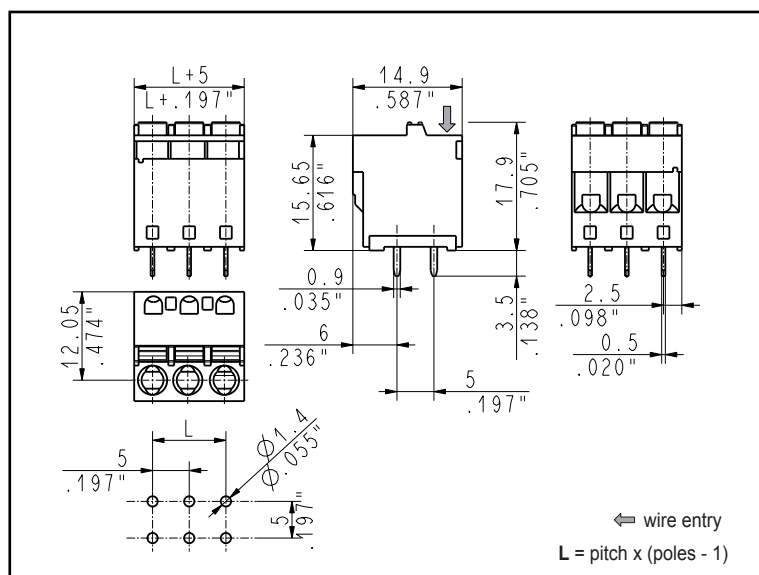


5mm Pitch Vertical




### 5.08mm Pitch Vertical

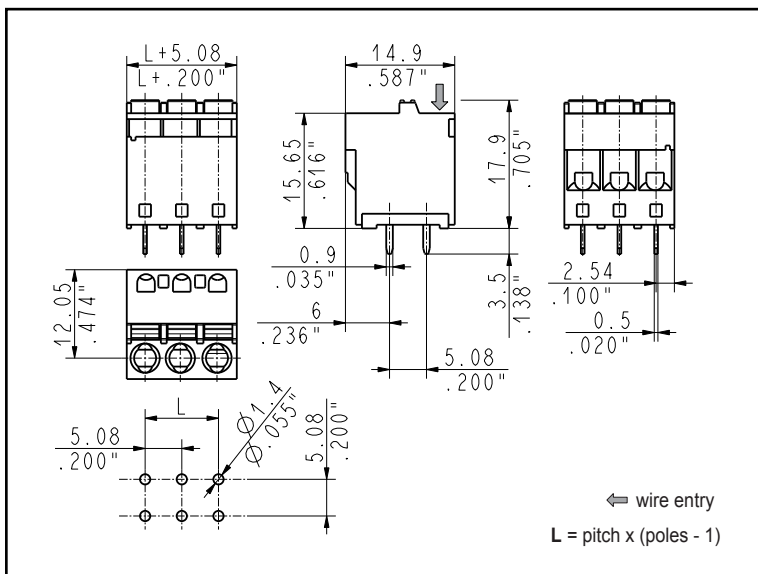


### 10.00mm Pitch Vertical

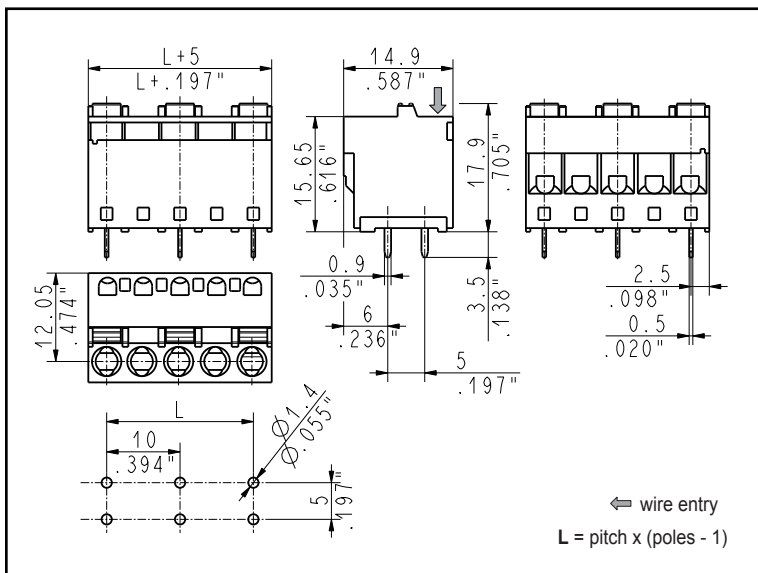


### 10.16mm Pitch Vertical

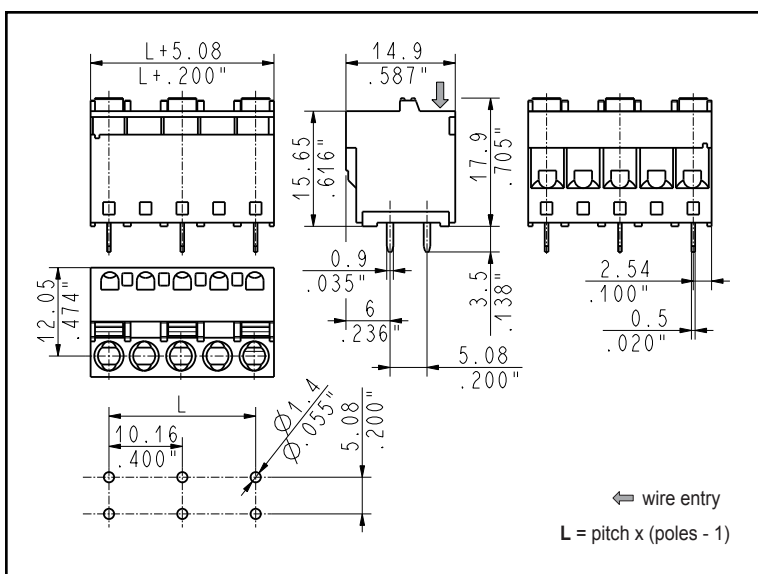


5.00mm Pitch Horizontal

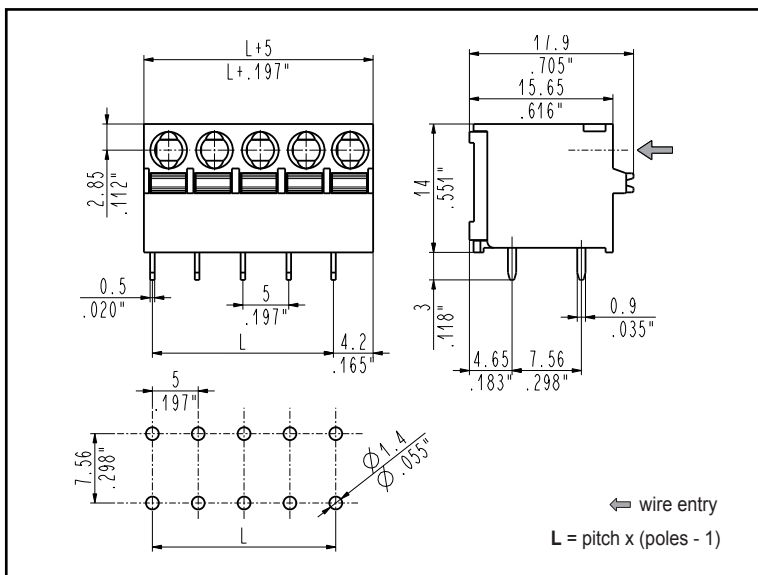


5.08mm Pitch Horizontal

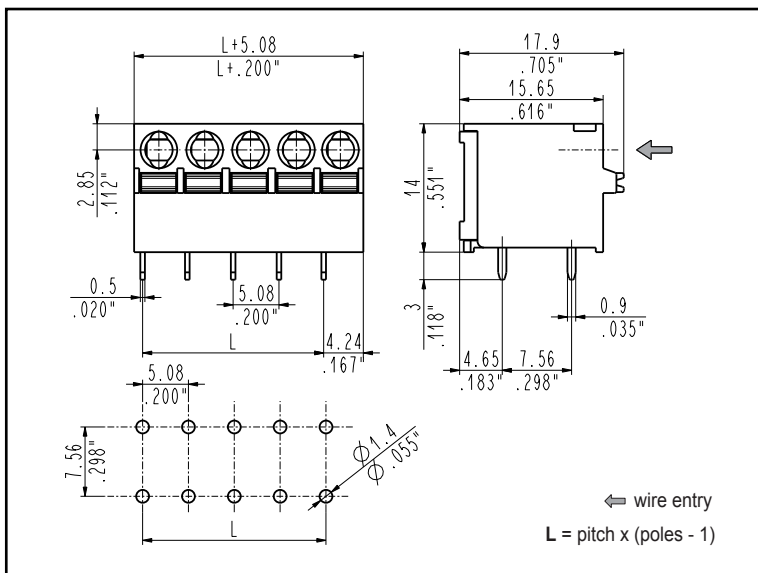

10.00mm Pitch Horizontal

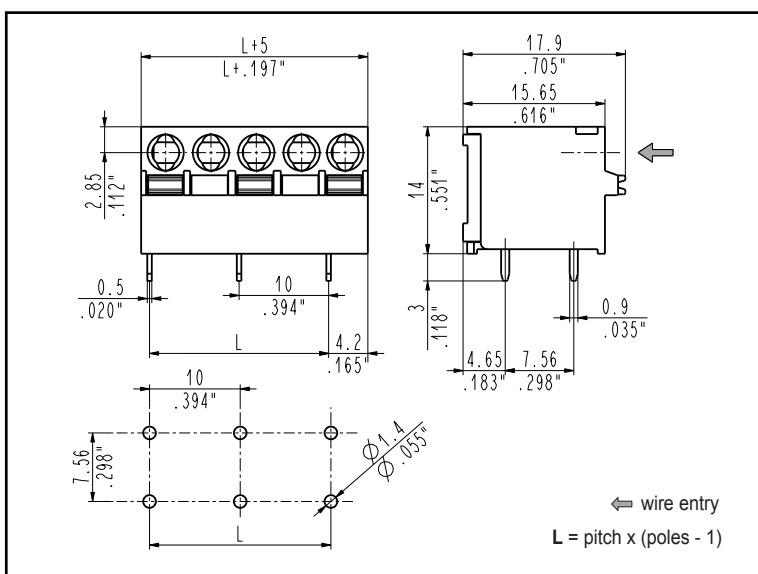

### 10.16mm Pitch Horizontal

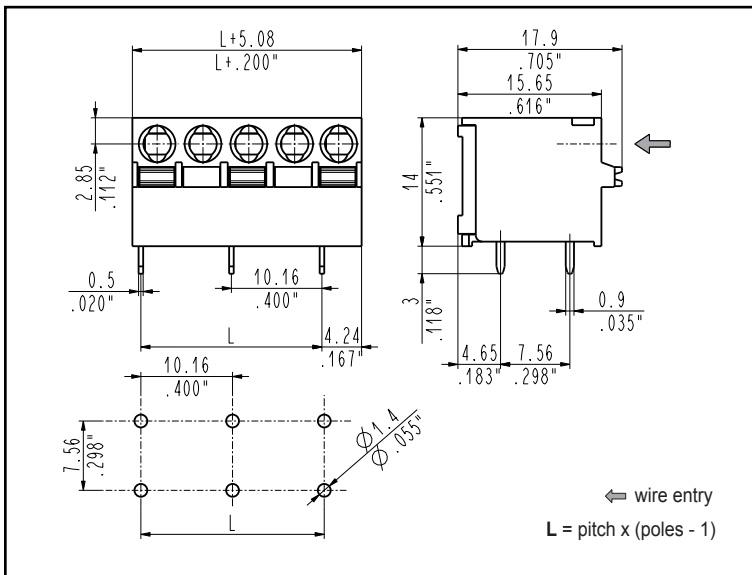

### ORDERING CODES

